



A NEW MODEL FROM OKUDA




**HIGH TECHNOLOGY PHOTOGRAPHIC SURVEILLANCE CAMERA
CONDENSED INTO THIS COMPACT MODEL**

**35^m/_m (TRIPLE-FRAME) PHOTOGRAPHIC SURVEILLANCE CAMERA
THE THRIFTY THIRTY-FIVE**

TOTAL SYSTEM



CONTROL PANEL

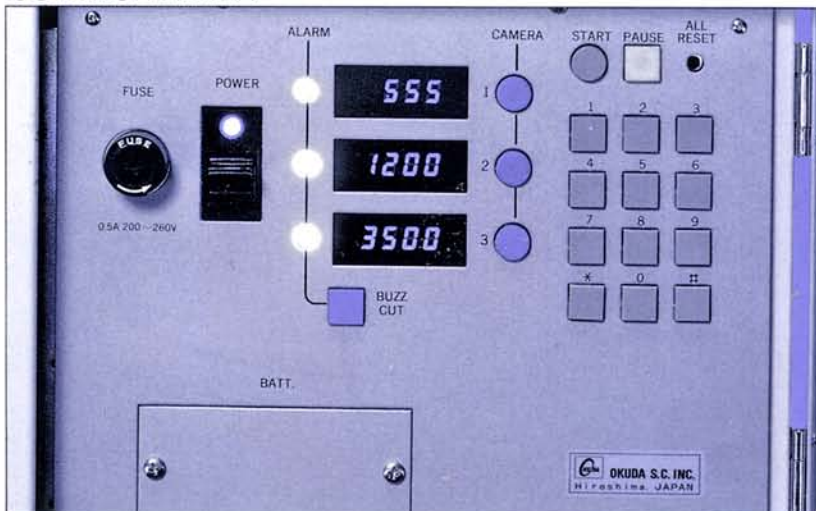

SPECIFICATIONS

FILM	: 35m/m, 100/150foot spool roll film.
NEGA SIZE	: 12×24m/m (Date data-1.5m/m)
NUMBER OF PHOTOGRAPHS	: 3,600 frames, (150foot spool roll film)
FILM LOADING	: Exclusive film magazine with capacity up to 150 feet.
LENS MOUNT	: PENTAX, K-Mount.
SHUTTER SPEED	: 1/60 sec.
OPERATING MODE	: 1) Single frame (Suspicious shooting) 2) Emergency shooting-two frames/sec. (Number of photos desired is controllable) (Can be stopped halfway through shooting by pausebutton) 3) Interval shooting. (Can be set 0 to 98 minutes)

IMPRINTING DATA	: Year/Month/Day/Hour/Minute. (10 digits)
POWER INPUT	: (A) AC100-120V Type, 50/60Hz. (B) AC200-240V Type, 50/60Hz.
SIZE & WEIGHT	: CAMERA : 241(H)×118(W)×185(D)m/m. 3.6kgs. (with Film-Magazine)
	: CONTROLLER : 220(H)×297(W)×110(D)m/m. 5.2kgs.

OPTIONAL ACCESSORIES

- 1) Opti. viewer. (to view angle)
- 2) Ceiling Bracket.
- 3) Spare Film magazine.

* The above specifications subject to change without notice.

THE THRIFTY 35

THE THRIFTY-35 System has a micro computer built into the controller (CC-36), which permits independent control of up to 3 cameras with date display and automates all shooting operations after replacement of film.

FEATURES

- ★Extremely low cost : 3,500 continuous photos per roll of 35mm, 150foot film.
- ★Greatly reduced noise level-Super silent operation.
- ★One control box for up to three cameras separately and yet simultaneously controlled.
- ★Battery backed : Camera will continue to take up to 3,000 photos without electricity.
- ★Full data and time printed directly on each negative by the latest LED system.
- ★Number of photos desired is controllable for each individual camera (Suspicious Shooting).
- ★Emergency shooting set by timer to control shots taken and avoid running to film end.
- ★Interval shooting can be set from 0 to 98 minutes.



SURVEILLANCE CAMERA SYSTEMS

OKUDA SURVEILLANCE CAMERA INC.

Hiroshima, Japan